

CAUTION

Provide ample ventilation. This gas appliance consumes air (oxygen). Do not use this appliance in an unventilated space to avoid endangering your life. If still more gas appliances and/or occupants using gas are added to the space, additional ventilation

must be provided.

Read these instructions carefully so as to familiarise yourself with the appliance before fitting the appliance to a gas cylinder.

Retain these instructions for future reference.

1. General

- The appliance complies with BS EN 498:2012, BS EN 484:2019 and SANS 1539:2017.
- This appliance shall only be used with an approved hose and regulator.
- Gas is supplied to the unit via a hose and regulator, connected to a gas cylinder or a CADAC Power Pak. The CADAC Power Pak is a unit that takes two or more gas cartridges. Note: hose, regulator and Power Pak are not supplied with the appliance.
- Gas appliances require ventilation for efficient performance and to ensure the safety of users and other persons in close proximity as the gas appliance consumes oxygen.
- Only to be used with a gas cylinder that does not exceed 500mm in height (regulator not included) and 400mm in width.
- When using a pot, the minimum recommended pot size is 150mm and maximum recommended size is 300mm.
- This appliance must be kept away from flammable materials during use.
- Use Outdoors Only.
- · Warning: Accessible parts may be very hot. Keep young children away.

		PRODUCT No. 5615				
Country of use	DK, FI, NO, NL, SE, AT, DE, SI	BE, ES, FR, IE, IT, PT, GB, CH	PL	AT, DE		
Appliance Catagories	I3B/P (30)	13+ (28-30/37)	I3B/P (37)	I3B/P (50)		
Allowable gases and operating pressure	Butane @ 28-30mbar Propane @ 28-30mbar Butane/Propane mixtures @ 28-30mbar (S. Africa - LPG @ 2,8kPa)	Butane @ 28-30mbar Propane @ 37mbar	Butane @ 37mbar Propane @ 37mbar Butane/Propane mixtures @ 37mbar	Butane @ 50mbar Propane @ 50mbar Butane/Propane mixtures @ 50mbar		
Nominal usuage	Butane - 196 grams/hour	Butane - 196 grams/hour	Butane - 196 grams/hour	Butane - 196 grams/hour		
Gross nom. heat input	2.7 kW	2.7 kW	2.7 kW	2.7 kW		
Jet number	80		79	74		
		Gas supply sources:				
a)	A refillable gas container not exceeding 11kg and complying with local regulation in force.					
b)	CA 445/CA 500 Cadac or equivalent EN417 compliant disposable cartridge with CADAC Power Pak 500.					

Country name abbreviations						
AT=Austria	DK=Denmark	GB=UnitedKingdom	NO=Norway			
BE=Belgium	ES=Spain	IE=Ireland	PL=Poland			
CH=Switzerland	FI=Finland	IT=Italy	PT=Portugal			
DE=Germany	FR=France	NL=Netherlands	SE=Sweden			
SI=Slovenia						

2. Safety information

<u>Hose</u>

- The hose must be checked for wear or damage before every use and before connecting to the gas container.
- Do not use the appliance if it has a damaged or worn hose. Replace the hose.
- · Do not use an appliance that is leaking, damaged or which does not operate properly.
- The minimum hose length is 600mm and it is recommended that the maximum hose length should not exceed 1.5m. Gas Container
- This appliance must only be used with an approved hose and regulator. (A 2.8kPa hose and regulator supplied only in South Africa)
 Ensure that the gas container is fitted or changed in a well-ventilated location, preferably outdoors, away from any sources of ignition
- such as naked flames, pilots, electric fires and away from other people.
- Keep gas containers away from heat and flame. Do not place on a stove or any other hot surface.
- Refillable cylinders are to be used only in the upright position so as to ensure proper fuel withdrawal. Failure to adhere to this may
 cause liquid discharge from the gas container resulting in a dangerous operating condition.
- Do not try to remove the cylinder whilst the unit is in operation.
- The gas cylinder must be disconnected from the appliance after use or when in storage.
- Not for use with a remote gas supply.

Assembly and use

- Use only on a firm level surface.
- Do not move the appliance during use.
- Ensure the appliance is used away from flammable materials. Minimum safe distances are: Above the appliance 1.2m. At the rear and sides 600mm
- WARNING: Accessible parts may be very hot, the use of protective gloves is recommended. Keep young children away.
- . Use outdoors only! Light back
- In the event of light back (where the flame burns back and ignites inside the burner or venturi housing), immediately turn off the gas supply by firstly closing the control valve on the gas cylinder and then the appliance valve. After the flame is extinguished, remove the regulator and check the condition of the seal; replace the seal if in doubt. Re-light the appliance.
- Should the flame persistently light back, return the product to your authorized CADAC repair agent.
- Leaks
- If there is a leak on your appliance (smell of gas), turn off the cylinder valve and take it outside immediately into a well-ventilated flame-free location where the leak may be detected and stopped. If you wish to check for leaks on your appliance, do it outside. Do not try to detect leaks using a flame; use soapy water.
- The correct way is to smear the joints with soapy water. If a bubble or bubbles form then there is a gas leak. Immediately turn off the gas supply firstly by closing the control valve on the gas container and then the appliance valve. Check that all the connections are properly fitted. Re-check with soapy water.
- If a gas leak persists, return the product to your CADAC dealer for inspection/repair.



PARTS LIST:


- A. Dome
- B. Chef Pan 40 C. Pizza Stone D. Grill@Braai 40
- E. BBQ Grid F. Pot Stand G. Fat Pan

- H. Burner Base I. Paella Pan 40
- J. Pizza Stone Pro 40 K. BBQ@Plancha 40 L. Trio Power Pak

The following surfaces are not included and are sold separately: Chef pan 40 (B), Pizza Stone (C), Grill ②Braai 40 (D), Paella Pan 40 (I), Pizza Stone Pro 40 (J) BBQ②Plancha 40 (K) and Trio Power Pak (L).

3. Operating the Appliance

- When operating this appliance, please take care to ensure that all parts are in good working order and that you have checked for any gas leaks before lighting the appliance.
- Items can simply be placed on top of each other.

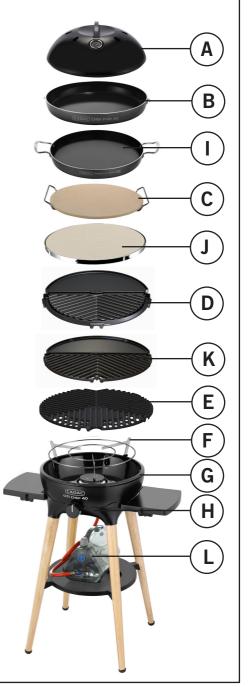

€N



€N

4. Fitting and Changing the Gas Cylinder

- After use, turn off the control knob to the off position ("•" turn fully clockwise) and close the gas cylinder valve.
- Ensure that the gas cylinder is fitted or changed in a well-ventilated location away from any source of ignition, such as naked flames
 and away from other people.
- Do not smoke while changing the cylinder.
- When you need to replace your empty cylinder, make sure that the gas is closed at the cylinder valve.
- Remove the regulator from the empty cylinder.
- Avoid twisting the hose whilst connecting the regulator to the new/replacement cylinder.
- Blow out any dust from the cylinder opening to prevent possible blockage of the jet.
- Place the full cylinder in its allocated space and attach the regulator connection to the cylinder.
- Ensure that a complete gas seal has been made (check for the smell of gas around the connection joint). Do not check for leaks with a
 naked flame. Use warm soapy water only, applied to the joints and connections of the appliance. Any leakage will show up as bubbles
 around the leakage area. If you are in doubt, contact your nearest stockist.

5. Cleaning

- Allow the appliance to cool down before you clean it.
- Use a damp cloth wrung out in a solution of soapy water to clean the exterior and cylinder storage area.
- The grill plate is coated with a tough durable ceramic non-stick coating that has been used with great success on some of the best cookware in the world. Never the less, taking care of it can help you to enjoy extra years of healthy, easy, non-stick cooking.
- · Whilst the non-stick coating is very durable, it can easily be damaged by the use of metal cooking utensils. It is therefore
- recommended that only plastic or wooden utensils be used when cooking.
- Always allow the grill plate to cool before immersing it in water.
- Make sure that no water gets onto the burners or pilot/light area. Wipe the appliance completely dry before use.
- Do not use abrasive cleaners as they may damage the surfaces.
- Clean the appliance after each use. After cleaning recondition the surface with a light wipe of oil.
- · Do not use any high-pressure steam equipment or a water jet to clean the appliance.
- Remove the fat from the moat of the Fat Pan.
- · Note: For stubborn stains, oven cleaner may be used.

6. Maintenance

 If you clean and maintain your appliance on a regular basis, the life of your appliance will extend and possibility of problems will decrease.

In case of a spattering flame or jet blockage:

- · Clean your burner ports in case of an over spill.
- CADAC recommends to clean or replace the jets every six (6) months to ensure continued efficient operation of your appliance.
- This may be done by removing the jet using standard tools and blow any dirt from the jet, alternatively, you may purchase new jets
 from your local CADAC store. Do not attempt to clean the jet mechanically.

Service intervals and servicing:

- CADAC recommends the service of your appliance to be every twelve (12) months by a service agent to ensure continued efficient
 operation.
- · Note: Any technical work on the appliance should only be performed by a qualified technician.
- · Check your gas hose and connections regularly for and signs of leaks and every time the gas cylinder is re-filled.
- Should the appliance operate abnormally after storage and all checks have not isolated the problem, the venturi may be blocked. A
 blocked venturi would be indicated by a weaker yellowish flame or no flame at all in extreme cases. Under these circumstances it will
 be necessary to remove the burner and to check and thoroughly clean out any foreign matter which may have gathered in the venturi.

7. Storage

- · Always allow the unit to cool down before storing.
- Turn off the cylinder valve supplying gas to the appliance, if you remove the cylinder, then disconnect the cylinder.
- Store cylinder in a well-ventilated area away from combustible material. Storage of cylinders should preferably be outdoors and must NOT be in a basement.

8. Returning the appliance for Repair, Service & Warranty

- Do not modify the appliance. This may cause the appliance to become unsafe. Any modifications will render the CADAC warranty null
 and void.
- If you cannot rectify any fault by following these instructions, contact your local CADAC distributor for advise, inspection or repair instructions.
- Please keep all proof of payments and the installation certificate for warranty purposes, if these cannot be supplied then all warranties will be considered void.
- This CADAC appliance is guaranteed by CADAC for a period of 5 years against factory fault.

€N

9. Spares & Accessories

Always use genuine CADAC spares as they have been designed to give optimum performance.

Spares							
Item	Spare No.	Item	Spare No.	Item	Spare No.		
	5610-SP001		5610-SP002	8	5610-SP003		
	5610-SP004		5610-SP006	6	5615-SP012		
	5600-SP004		HM6-074 (Jet 0.74 50mbar) HM6-079 (Jet 0.79 37mbar) HM6-080 (Jet 0.80 28/30mbar)		5615-SP006		
	5615-SP009		5615-SP010		5615-SP011		
		Acces	sories				
Item	Spare No.	Item	Spare No.	Item	Spare No.		
	5610-300		98368		8600-200		
	5610-200		8600-100		370-EU 370-UК 370-ZA		
	5650-SP003		5610-400		98433		
	5650-SP003		5610-400		98433		

10. Warranty

CADAC (Pty) Ltd hereby Limit warrants to the ORIGINAL PURCHASER of this CADAC gas appliance, that it will be free of defects in material and workmanship from the date of purchase as follows:

5 Years
No Warranty
5 Years
1 Year

The warranty will only apply if the unit is assembled and operated in accordance with the printed instructions.

CADAC may require reasonable proof of your date of purchase. THEREFORE, YOU SHOULD RETAIN YOUR SALES SLIP OR INVOICE.

This Limited Warranty shall be limited to the repair or replacement of parts that prove defective under normal use and service and which on examination shall indicate, to CADAC's satisfaction, they are defective. Before returning any parts, contact the customer service representative in your region using the contact information provided with your manual. If CADAC confirms the defect and approves the claim, CADAC will elect to replace such parts without charge. CADAC will return parts to the purchaser, freight or postage prepaid.

This Limited Warranty does not cover any failures or operating difficulties due to accident, abuse, misuse, alteration, misapplication, vandalism, improper installation or improper maintenance or service, or failure to perform normal and routine maintenance, including but not limited to damage caused by insects within the burner tubes, as set out in this owner's manual. Deterioration or damage due to severe weather conditions such as hail, hurricanes, earthquakes or tornadoes, discoloration due to exposure to chemicals either directly or in the atmosphere, is not cover by this Limited Warranty.

There are no other express warrants except as set forth herein and any applicable implied warranties of merchantability and fitness are limited in duration to the period of coverage of this express written Limited Warranty. Some regions do not allow limitation on how long an implied warranty lasts, so this limitation may not apply to you.

CADAC is not liable for any special, indirect or consequential damages. Some regions do not allow the exclusion or limitation of incidental or consequential damages, to this limitation or exclusion may not apply to you.

CADAC does not authorize any person or company to assume for it any obligation or liability in connection with the sale, installation, use, removal, return, or replacement of its equipment; and no such representations are binding on CADAC.

This Warranty applies only to products sold at retail.

To enjoy and ensure longevity of your CADAC product, please refer to the cleaning and maintenance section of the user manual with particular attention to the care of the Stainless Steel.

CADAC INTERNATIONAL

P.O. Box 43196, Industria, 2042 South Africa Tel: +27 11 470 6600 Email: info@cadac.co.za www.cadacinternational.com

CADAC UK

14 Deanfield Court, Link59 Business Park, Clitheroe, Lancashire, BB7 10S United Kingdom. Tel: +44 (0) 333 2000363 E:mail: info@cadacuk.com www.cadacinternational.com

CADAC MOZAMBIQUE

Exclusive Brands Africa 492 Avenida Namaacha Maputo, Mozambique Tel: +258 21 406254 www.cadac.co.mz

CADAC IRAN

Robin Bazarganan Carin Co. Unit D, 6th Floor, Negin Zafar Building, No.1327, Shariati Street, Tehran, Iran Tel: +98 21 276 00 781 Mail: info@cadac.ir

CADAC CHINA

Room 807, Huayue International Building, No.255 Tiangao Road, South Yinzhou business district, Ningbo, China Tel:+86 574 87723937 Email: info@cadac.com.cn

CADAC SWEDEN & NORWAY

KAMA FRITID AB 0046 36 353700 info@kamafritid.se

CADAC EUROPE

Ratio 26, 6921 RW Duiven The Netherlands Tel: +31 26 319 7740 Email: info@cadaceurope.com www.cadacinternational.com

CADAC SCANDINAVIA

Millarco International A/S Rokhøj 26 8520 Lystrup, Denmark Phone: +45 87 43 42 00 millarco@millarco.dk www.millarco.com

CADAC MONTENEGRO

City kvart Z1L6 81000 Podgorica, Montenegro Tel 38220671446, 38269020063 E-mail: coca@t-com.me

CADAC DENMARK

Camper Fritid Industrivej 11 6640 Lunderskov, Denmark Tel.: +45 7558 5255 Email: info@camper.dk www.camper.dk

CADAC ZIMBABWE

Exclusive Brands Africa Unit 8 Birkenhead Park 43 Josiah Chinamano Street Belmont, Bulawayo Tel: +263 971 740 (Bul) Tel: +263 479 2564 (Har) www.cadac.co.zw

CADAC GERMANY

Ratio 26, 6921 RW Duiven The Netherlands Tel: +31 26 319 7740 Email: info@cadaceurope.com www.cadacinternational.com

CADAC Czech Rep.

RÖSLER Praha spol. s r.o. K Horkám 19/21 102 00 Praha 10 Česká republika Tel: +420 267 188 011 Email: info@rosler.cz www.rosler.cz

CADAC FINLAND

OY KAMA FRITID AB Koivuhaantie 2-4 B 01510 VANTAA 00358 20 792 0310 info@kamafritid.fi

CADAC POLAND

Kamai Wola Batorska 461 32-007 Wola Batorska Poland Tel: +48 12 635 1373 Email: handlowy@kamai.pl www.kamai.pl

CADAC ZAMBIA

Exclusive Brands Africa Limited 7225A Kachidza Road Light Industrial Area Lusaka, Zambia Tel: +260 211 842015 Tel: +260977 345034 Email: info@ebagrp.com

CADAC FRANCE

Le Viallon, 42520 Veranne France Tel: +33 4 74 78 13 65 Email : info@cadaceurope.com www.cadacinternational.com

CADAC NEW ZEALAND

Riverlea Group (Pty) Ltd 2A Maui Street, Pukete, Hamilton 3200, New Zealand Tel: +64 7 847 0204 Email: sales@riverleagroup.co.nz www.riverleagroup.co.nz

CADAC U.A.E.

Supreme Impex General Trading LLC Office No. 1801-7 Latifa Tower Sheikh Zayed Road Dubai, UAE

CADAC ITALY

Brunner SRL/GMBH via Buozzi, 8 39100 Bolzano (Italy) Tel: +39 0471 542900 Email: info@brunner.it www.brunnerinternational.com

CADAC SOUTH EAST EUROPE

Bulevar oslobodjenja 285 Tel: +381 11 339 2700 Email: sinisaj@cadac.rs www.cadac.rs